

Safety Certifications

Mi-T-M builds safe, reliable products. In the U.S., UL and CSA International is accredited by the **Occupational Health and Safety Administration (OSHA)** as a **Nationally Recognized Testing Laboratory (NRTL)**. Generally speaking, all OSHA accredited laboratories conduct their tests against the same set of U.S. standards and codes, regardless of who authors or publishes them. Having undergone detailed scrutiny of our technical competence, integrity and certification testing facility, Mi-T-M is authorized by CSA to perform much of the product certification work in-house with NRTL audits to assure credibility. The mark of CSA, ETL or UL on a Mi-T-M product is an extra assurance of safety.



CSA Group - the **Canadian Standards Association** - for standards development, information products, sale of publications, training, and membership services. **CSA International** - for product testing and certification, also test to applicable U.S. standards, which include ANSI, UL, CSA, NSF and others. **QMI** - for management systems registration. CSA marks appear on over one billion products worldwide.



Intertek's ETL Semko division has for over 100 years, dating back to Thomas Edison's **Electrical Testing Laboratories (ETL)**, been the global leader in the testing, inspection and certification of products. The ETL listed mark is the legal equivalent of the the UL listed and CSA listed marks, designated by OSHA and the Standards Council of Canada. When Mi-T-M products bear Intertek's proprietary ETL listed mark, the letters ETL will carry with them a long history of innovation, influence and independence.



UL, "Underwriters Laboratories Inc", the trusted source across the globe for product compliance. UL has tested products for public safety for more than a century. UL can offer one of the conformity assessment industry's broadest portfolios of capabilities and certification marks. Their unique mix of local expertise in global markets and deep industry knowledge helps bring safer products to market.




Mi-T-M Corporation's pressure washers have received certification from CETA under the **CETA Performance Certification Standard**. This standard clearly defines performance criteria and test procedures for certification of hot and cold-water pressure washers. CETA certification guarantees the buyer that products are designed, built and tested to rigid performance standards. Machines must operate within +/-5% of advertised performance rating. Data for all Performance Certified models are on file at CETA headquarters, and periodic peer reviews ensures consistent quality.

Electric/Gasoline - Direct Drive


CD Series

The CD Series is perfect for when transporting and storage space are at a premium.


Stainless-steel and brass unloader with adjustable pressure valve and forged brass manifold



Pump accepts incoming water up to 180°F (2MUH models)



35 foot, 15 amp power cord (20 amp plug on CD-1502 models) with ground fault circuit interrupter (GFCI) (Electric models only)



NEMA 5-15P,
15 amp plug

NEMA 5-20P,
20 amp plug



CD-1502-0MUH



CD-2003-0MHH



One (1) year limited parts & labor warranty

Five (5) year limited warranty on pump

Additional Features

- Direct drive triplex piston General pump with ceramic plungers
- Low pressure detergent injection optional
- Thermal relief valve
- In-line water strainer
- Powder coated steel mounting plate with center balanced lift and four rubber isolators
- Professional-grade insulated trigger gun with safety lock-off

Gasoline Features

- Performance-proven OHV engine with low-oil protection
- 3/8 inch x 50 foot non-marking pressure hose with quick connects, swivel and bend restrictors

- 36 inch lance with rubber grip and quick connect nozzles (0°, 15°, 25° and detergent nozzle)

Electric Features

- Totally enclosed fan-cooled electric motor with thermal overload protection
- 3/8 inch x 25 foot non-marking hose with quick connects, swivel and bend restrictors
- 36 inch two-piece insulated wand
- Variable high/low pressure nozzle with adjustable spray pattern (15 degree high/low pressure nozzle on 2MUH models)
- Safety relief valve

Model #	CD-1002-0MUH	CD-1002-2MUH*	CD-1502-0MUH	CD-1502-2MUH*	CD-2003-0MHH
Pressure (psi)	1000	1000	1500	1500	2000
Flow (gpm)	2.0	2.0	2.0	2.0	2.7
Motor/Engine	120V/10/12.5A	120V/10/12.5A	120V/10/17.0A	120V/10/17.0A	Honda OHV
Horsepower	1.5	1.5	2.0	2.0	5.5
Dim. (LxWxH)	20in.x11.5in.x14in.	20in.x11.5in.x14in.	20in.x11.5in.x14in.	20in.x11.5in.x14in.	18in.x14.5in.x18in.
Shipping weight	70 lbs.	71 lbs.	75 lbs.	76 lbs.	75 lbs.
Net weight	58 lbs.	66 lbs.	63 lbs.	70 lbs.	56 lbs.

*Pump accepts incoming water up to 180 degrees.

Options:

- CX-0030 50 foot high pressure hose - For when you need extra hose for added mobility
- AW-8400-0018 Low pressure detergent injector - Allows user to apply the recommended detergents

Model #	CX-0030	AW-8400-0018
CD-1002	●	●
CD-1502	●	●
CD-2003	●	●

M-T-M Corporation • 800-553-9053 • E-mail: corp@mtm.com • Website: www.mtm.com

CA Series


Gasoline - Direct Drive - Aluminum

NEW!


**1 inch
aluminum
tube
handles
with new
handle
design for
easier pulling**



**3/16 inch
aluminum
base plate
and solid
full-length
axle**




**Patent
pending
isolation
plate for
less frame
vibration**



**Pneumatic
tires with
tubes for
longer life**



**Convenient
nozzle holder
for quick
connect
nozzles (0°,
15°, 25° and
detergent nozzle)**



CA-3003-OMRB

Model #	CA-2403-OMHB	CA-2403-OMRB	CA-2703-OMHB	CA-2703-OMRB	CA-3003-OMHB	CA-3003-OMRB
Pressure (psi)	2400	2400	2700	2700	3000	3000
Flow (gpm)	2.4	2.4	2.4	2.4	3.0	3.0
Engine	Honda OHV	Subaru OHC	Honda OHV	Subaru OHC	Honda OHV	Subaru OHC
Horsepower	5.5	6.0	6.5	7.0	9.0	9.0
Dim. (LxWxH)	39in.x20.5in.x24.5in.	39in.x20.5in.x24.5in.	39in.x20.5in.x24.5in.	39in.x20.5in.x24.5in.	42.5in.x23.5in.x24.5in.	42.5in.x23.5in.x24.5in.
Shipping weight	103 lbs.	103 lbs.	103 lbs.	103 lbs.	155 lbs.	155 lbs.
Net weight	76 lbs.	76 lbs.	76 lbs.	76 lbs.	105 lbs.	105 lbs.

Model #	CA-3004-OMHB	CA-3304-OMHB	CA-3504-OMHB	CA-4004-OMHB
Pressure (psi)	3000	3300	3500	4000
Flow (gpm)	3.9	3.5	3.5	3.5
Engine	Honda OHV	Honda OHV	Honda OHV	Honda OHV
Horsepower	13.0	11.0	13.0	13.0
Dim. (LxWxH)	42.5in.x23.5in.x24.5in.	42.5in.x23.5in.x24.5in.	42.5in.x23.5in.x24.5in.	42.5in.x23.5in.x24.5in.
Shipping weight	175 lbs.	175 lbs.	175 lbs.	175 lbs.
Net weight	125 lbs.	125 lbs.	124 lbs.	124 lbs.

MI-T-M Corporation • 800-553-9053 • E-mail: corp@mitm.com • Website: www.mitm.com

The CA Series aluminum pressure washer is perfect for areas where corrosion is an issue. This lightweight unit is easy to move no matter what the application.



CA-2703-0MHB

Additional Features

- Performance-proven engine with low-oil protection
- Direct drive triplex piston AR pump with ceramic plungers
- Thermal relief valve
- Adjustable pressure
- Stainless-steel and brass unloader
- Forged brass manifold
- In-line water strainer
- Adjustable low pressure detergent injection optional
- Lighter, corrosion resistant aluminum frame
- Dual rubber isolators
- 3/8 inch x 50 foot non-marking hose with quick connects, swivel and bend restrictors
- Professional-grade insulated trigger gun with safety lock-off
- 36 inch lance with rubber grip

One (1) year limited parts & labor warranty

Five (5) year limited warranty on pump

Options:

CX-0005

Insulated dual lance - Has both a high and low pressure tip that allows you to switch to the low pressure chemical injector without having to change tips

CX-0006

4000 PSI hose - Upgrades pressure hose to 4000 PSI rating

AW-8400-0021

Low pressure detergent injection - Allows the user to apply the recommended detergents

50-0161

High pressure detergent injection - High pressure water mixes with detergent to clean even the heaviest build-up

Model #	CX-0005	CX-0006	50-0161	AW-8400-0021
All Models	●	●	●	●

JP Series

Gasoline - Direct Drive

Stainless-steel and brass unloader with adjustable pressure and forged brass manifold

1 inch powder coated steel tube handles with gun/wand holder

3/16 inch powder coated and welded steel base plate

Frame has convenient cutouts for changing pump and engine oil

Pneumatic tires with tubes for longer life



JP-3003-OMRB

Model #	JP-2403-OMHB	JP-2403-OMRB	JP-2403-OMVB	JP-2703-OMHB	JP-2703-OMRB
Pressure (psi)	2400	2400	2400	2700	2700
Flow (gpm)	2.4	2.4	2.4	2.4	2.4
Engine	Honda OHV	Subaru OHC	Vanguard OHV	Honda OHV	Subaru OHC
Horsepower	5.5	6.0	6.0	6.5	7.0
Dim. (LxWxH)	30in.x21in.x26in.	30in.x21in.x26in.	30in.x21in.x26in.	30in.x21in.x26in.	30in.x21in.x26in.
Shipping weight	110 lbs.	110 lbs.	119 lbs.	110 lbs.	110 lbs.
Net weight	85 lbs.	85 lbs.	92 lbs.	85 lbs.	85 lbs.

Model #	JP-3003-OMHB	JP-3003-OMRB	JP-3003-OMVB	JP-3003-2MHB*	JP-3003-2MRB*	JP-3003-2MVB*
Pressure (psi)	3000	3000	3000	3000	3000	3000
Flow (gpm)	3.0	3.0	3.0	3.0	3.0	3.0
Engine	Honda OHV	Subaru OHC	Vanguard OHV	Honda OHV	Subaru OHC	Vanguard OHV
Horsepower	9.0	9.0	9.0	9.0	9.0	9.0
Dim. (LxWxH)	35in.x22.5in.x26in.	35in.x22.5in.x26in.	35in.x22.5in.x26in.	35in.x22.5in.x26in.	35in.x22.5in.x26in.	35in.x22.5in.x26in.
Shipping weight	171 lbs.	171 lbs.	173 lbs.	171 lbs.	171 lbs.	173 lbs.
Net weight	121 lbs.	121 lbs.	123 lbs.	121 lbs.	121 lbs.	123 lbs.

*Models equipped with General pumps, all other models equipped with AR pumps.



These heavy-duty pressure washers were designed to be compact and easy to maneuver, yet durable enough to handle all of your contractor applications.



JP-2703-0MHB

Additional Features

- Performance-proven engine with low-oil protection
- Direct drive triplex piston General or AR pump with ceramic plungers
- Thermal relief valve
- Stainless-steel and brass unloader
- In-line water strainer
- Adjustable low pressure detergent injection optional
- Convenient hose wrap
- Dual rubber isolators
- Solid steel threaded axle
- Quick connect nozzles (0°, 15°, 25° and detergent nozzle)
- 3/8 inch x 50 foot non-marking hose with quick connects, swivel and bend restrictors
- Professional-grade insulated trigger gun with safety lock-off
- 36 inch lance with rubber grip

One (1) year limited parts & labor warranty

Five (5) year limited warranty on pump

Model #	JP-3004-0MHB	JP-3004-0MVB	JP-3004-2MHB*	JP-3004-2MVB*	JP-3304-0MHB	JP-3304-0MVB
Pressure (psi)	3000	3000	3000	3000	3300	3300
Flow (gpm)	3.9	3.9	3.9	3.9	3.3	3.3
Engine	Honda OHV	Vanguard OHV	Honda OHV	Vanguard OHV	Honda OHV	Vanguard OHV
Horsepower	13.0	13.0	13.0	13.0	11.0	11.0
Dim. (LxWxH)	35in.x22.5in.x26in.	35in.x22.5in.x26in.	35in.x22.5in.x26in.	35in.x22.5in.x26in.	35in.x22.5in.x26in.	35in.x22.5in.x26in.
Shipping weight	186 lbs.	190 lbs.	186 lbs.	190 lbs.	184 lbs.	188 lbs.
Net weight	136 lbs.	140 lbs.	136 lbs.	140 lbs.	134 lbs.	138 lbs.

Model #	JP-3504-0MHB	JP-3504-0MVB	JP-3504-2MHB*	JP-3504-2MVB*	JP-4003-0MHB	JP-4003-0MVB	JP-4004-0MVB
Pressure (psi)	3500	3500	3500	3500	4000	4000	4000
Flow (gpm)	3.5	3.5	3.5	3.5	3.0	3.0	4.0
Engine	Honda OHV	Vanguard OHV	Honda OHV	Vanguard OHV	Honda OHV	Vanguard OHV	Vanguard OHV
Horsepower	13.0	13.0	13.0	13.0	13.0	13.0	16.0
Dim. (LxWxH)	35in.x22.5in.x26in.	35in.x22.5in.x26in.	35in.x22.5in.x26in.	35in.x22.5in.x26in.	35in.x22.5in.x26in.	35in.x22.5in.x26in.	39.5in.x28.5in.x29in.
Shipping weight	186 lbs.	190 lbs.	186 lbs.	190 lbs.	186 lbs.	190 lbs.	268 lbs.
Net weight	136 lbs.	140 lbs.	136 lbs.	140 lbs.	136 lbs.	140 lbs.	192 lbs.

**Models equipped with General pumps, all other models equipped with AR pumps.*

Options: Consult factory for available options

JP Series

Powerful pressure washers built with heavy-duty components to tackle indoor industrial and agricultural applications.

Electric - Direct Drive

Stainless-steel and brass unloader with adjustable pressure valve and forged brass manifold

1 inch powder coated steel tube handles with gun/wand holder

3/16 inch powder coated steel base plate



JP-1502-0ME1

NEMA 5-15P, 15 amp plug

NEMA 5-20P, 20 amp plug

One (1) year limited parts & labor warranty

Five (5) year limited warranty on pump

Additional Features

- Totally enclosed fan-cooled electric motor
- Direct drive triplex piston General or AR pump with ceramic plungers
- Low pressure adjustable detergent injection
- In-line water strainer
- Safety relief valve
- 35 foot power cord (ground fault circuit interrupter, GFCI, on 1.5-6.0 HP single-phase models only)
- NEMA 5-20P 20 amp plug (1500 PSI model only)
- Quick connect nozzles (0°, 15°, 25° and detergent nozzle) (2500 & 3000 PSI models only)
- Convenient hose wrap
- Dual rubber isolators
- Solid steel threaded axle
- Pneumatic tires with tubes for longer life
- 3/8 inch x 25 foot non-marking hose with quick connects, swivel and bend restrictors (50 foot hose on 2500 & 3000 PSI models)
- Professional-grade insulated trigger gun with safety lock-off
- 36 inch two-piece lance with rubber grip
- Variable high/low pressure nozzle (1000-2000 PSI models only)



Model #	JP-1002-0ME1*^#	JP-1502-0ME1*^#	JP-2003-1ME1*^#	JP-2503-1ME1*^#	JP-2503-0ME3	JP-3004-1ME1^	JP-3004-0ME3
Pressure (psi)	1000	1500	2000	2500	2500	3000	3000
Flow (gpm)	2.0	2.0	2.8	3.2	3.2	3.9	3.9
Motor	120V, 1Ø, 15.0A	120V, 1Ø, 20.0A	230V, 1Ø, 16.0A	230V, 1Ø, 24.1A	230V, 3Ø, 15.0 or 460V, 3Ø, 7.5A	230V, 1Ø, 34.5A	230V, 3Ø, 20.0A or 460V, 3Ø, 10.0A
Horsepower	1.5	2.0	4.0	6.0	6.0	8.0	8.0
Dim. (LxWxH)	30in.x21in.x26in.	30in.x21in.x26in.	35in.x21in.x26in.	44in.x26in.x27in.	44in.x26in.x27in.	44in.x26in.x27in.	44in.x26in.x27in.
Shipping weight	120 lbs.	120 lbs.	162 lbs.	275 lbs.	275 lbs.	275 lbs.	275 lbs.
Net weight	90 lbs.	90 lbs.	112 lbs.	225 lbs.	225 lbs.	225 lbs.	225 lbs.

*35 foot cord with ground fault circuit interrupter (GFCI).

^Single phase models are CSA certified.

#Models equipped with General pumps, all other models equipped with AR pumps.

Options:

Consult Factory
CX-0005

CX-0006
AW-8400-0021

50-0161

460V on 6.0 & 8.0 HP, 3 Phase Models - For when you have 460 volts of power available


Insulated dual lance - Has both a high and low pressure tip that allows you to switch to the low pressure chemical injector without having to change tips

4000 PSI Hose - Upgrades pressure hose to 4000 PSI rating
Low Pressure Detergent Injection - Allows the user to apply the recommended detergents


High Pressure Detergent Injection - High pressure water mixes with detergent to clean even the heaviest build-up

Model #	460V	CX-0005	CX-0006	AW-8400-0021	50-0161
JP-1002-0ME1		●	●	●	●
JP-1502-0ME1		●	●	●	●
JP-2003-1ME1		●	●	●	●
JP-2503-1ME1		●	●	●	●
JP-2503-0ME3	●	●	●	●	●
JP-3004-1ME1		●	●	●	●
JP-3004-0ME3	●	●	●	●	●

Why Mi-T-M?

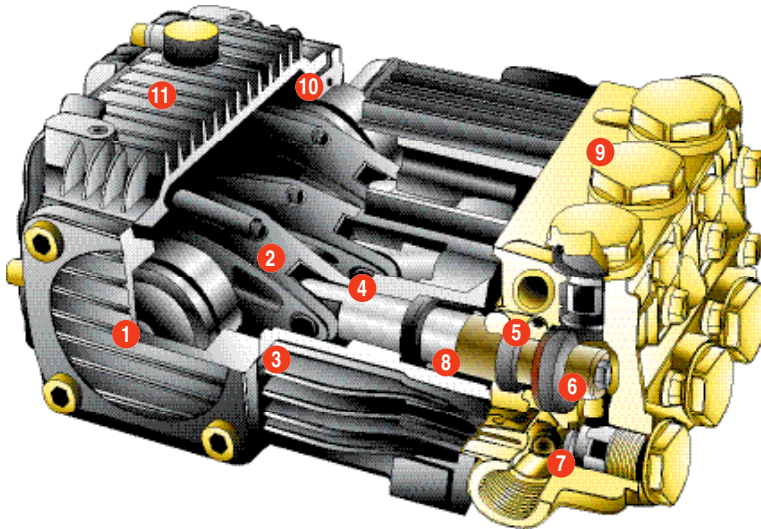

1. Forged, precision ground and hardened crankshaft for extremely long life and durability.
2. One-piece special alloy aluminum or bronze connecting rods for higher pressure, oversized for maximum strength, load distribution and life.
3. Precision ground and hardened steel rod pins are oversized for load distribution.
4. Stainless-steel plunger rods for strength, back-up and O-ring plunger sealing system.
5. "U"-cup double-lip low pressure seals for a positive seal.
6. "V"-style high pressure seal continuously lubricates for extended life.
7. Ultra form valve cages for durability, strength and long life.
8. Plungers are a special aluminum oxide blend, solid ceramic for long life, durability and resiliency.
9. Forged brass manifold for strength and long life.
10. Oversized tapered roller bearings for maximum life and load distribution.
11. Crankcase is precision die-cast anodized, with large cooling fins, for maximum heat dissipation.

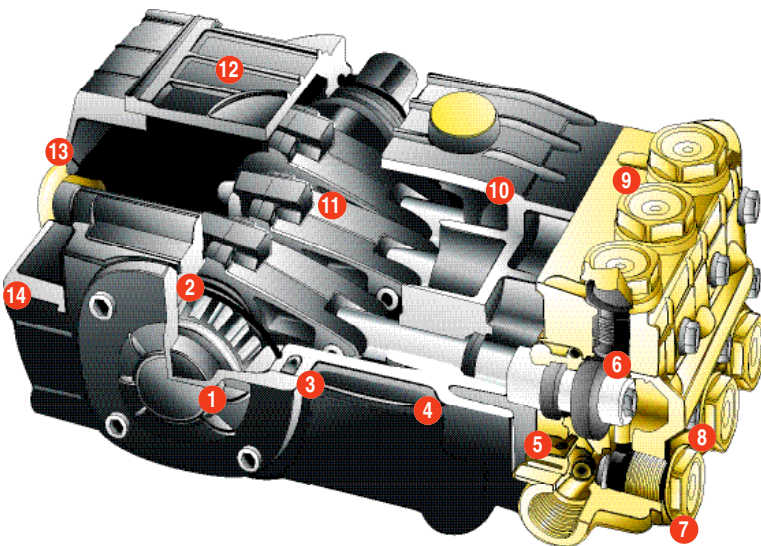

1. Forged, precision ground and hardened crankshaft provides unmatched strength and surface hardness for long life and durability.
2. Heavy-duty taper roller bearings provide extended life and load distribution.
3. Oversized precision ground and hardened steel connecting rod pins for exceptional load distribution.
4. Replaceable plunger guide bushing provides alignment of plunger guide increasing seal life.
5. Exclusive wet sealing system design which allows the pumped fluid to cool and lubricate the high pressure seal on both sides.
6. Replaceable ceramic plungers provide maximum resistance to corrosion and abrasion while ensuring long pressure seal life.
7. Stainless-steel inlet and outlet valve increase pump efficiency.
8. Stainless-steel plunger bolt provides better alignment and sealing.
9. Forged brass manifold provides high strength and corrosion resistance.
10. Vented oil dipstick is designed to prevent water from entering crankcase.
11. Two-piece oversized connecting rods provide high strength and a lightweight bearing surface with exceptional load distribution.
12. Heavy-duty aluminum crankcase provides high strength and maximum heat dissipation.
13. Oil level sight glass provides a quick indication of the oil level.
14. Oil drain plug provides an easy way to change the pump crankcase oil.


Mi-T-M Corporation • 800-553-9053 • E-mail: corp@mtm.com • Website: www.mtm.com

CBA Series

Gasoline - Belt Drive - Aluminum

NEW!


Water filter with clear sleeve for screen inspection




1 inch aluminum tube handles with new handle design for easier pulling




3/16 inch aluminum base plate and solid full-length axle



Patent pending isolation plate for less frame vibration



Dual cogged belt drive system to prevent slippage



Two-piece belt guard for quick access to belts



CBA-3504-0MHB

Model #	CBA-2504-0MHB	CBA-2504-0MRB	CBA-3003-0MHB	CBA-3003-0MRB
Pressure (psi)	2500	2500	3000	3000
Flow (gpm)	3.6	3.6	3.0	3.0
Engine	Honda OHV	Subaru OHC	Honda OHV	Subaru OHC
Horsepower	9.0	9.0	9.0	9.0
Dim. (LxWxH)	47in.x27.5in.x27.5in.	47in.x27.5in.x27.5in.	47in.x27.5in.x27.5in.	47in.x27.5in.x27.5in.
Shipping weight	181 lbs.	173 lbs.	181 lbs.	173 lbs.
Net weight	131 lbs.	123 lbs.	131 lbs.	123 lbs.

Model #	CBA-3004-0MHB	CBA-3504-0MHB	CBA-4004-0MHB
Pressure (psi)	3000	3500	4000
Flow (gpm)	3.5	3.7	3.4
Engine	Honda OHV	Honda OHV	Honda OHV
Horsepower	11.0	13.0	13.0
Dim. (LxWxH)	47in.x27.5in.x28.5in.	47in.x27.5in.x28.5in.	47in.x27.5in.x28.5in.
Shipping weight	200 lbs.	200 lbs.	200 lbs.
Net weight	150 lbs.	150 lbs.	150 lbs.

Modeled after the JCW Series, the CBA belt driven pressure washer series offers a lightweight alternative for areas where corrosion is an issue.

**Lightweight
Aluminum
Frame**

**Corrosion-
Free**



CBA-3504-0MHB

Additional Features

- Performance-proven engine with low-oil protection
- Belt drive triplex piston AR pump with ceramic plungers
- Thermal relief valve
- Adjustable pressure
- Stainless-steel and brass unloader
- Forged brass manifold
- Lighter, corrosion resistant aluminum frame
- Dual rubber isolators
- Quick connect nozzles (0°, 15°, 25° and 40°)
- Pneumatic tires with tubes for longer life
- 3/8 inch x 50 foot non-marking hose with quick connects, swivel and bend restrictors
- 36 inch lance with rubber grip
- Professional-grade insulated trigger gun with safety lock-off

**One (1) year limited parts
& labor warranty**

**Five (5) year limited
warranty on pump**

Options:

CX-0005

Insulated dual lance - Has both a high and low pressure tip that allows you to switch to the low pressure chemical injector without having to change tips

CX-0006

4000 PSI hose - Upgrades pressure hose to 4000 PSI rating

AW-8400-0021

Low pressure detergent injection - Allows the user to apply the recommended detergents

50-0161

High pressure detergent injection - High pressure water mixes with detergent to clean even the heaviest build-up


Model #	CX-0005	CX-0006	50-0161	AW-8400-0021
All Models	●	●	●	●

M-T-M Corporation • 800-553-9053 • E-mail: corp@mtm.com • Website: www.mtm.com


JCW Series

Gasoline - Belt Drive

Water filter with clear sleeve for screen inspection



Solid steel threaded axle for added strength



Dual cogged belt drive system to prevent slippage



Two-piece belt guard with 1/4-turn release for quick access to belts



JCW-3004-0MHB


Model #	JCW-1504-0MHB	JCW-1504-0MRB	JCW-1504-0MVB	JCW-2003-0MHB	JCW-2003-0MRB	JCW-2003-0MVB	JCW-2504-0MHB
Pressure (psi)	1500	1500	1500	2000	2000	2000	2500
Flow (gpm)	3.4	3.4	3.4	2.8	2.8	2.8	3.6
Engine	Honda OHV	Subaru OHC	Vanguard OHV	Honda OHV	Subaru OHC	Vanguard OHV	Honda OHV
Horsepower	5.5	6.0	6.0	5.5	6.0	6.0	9.0
Dim. (LxWxH)	37.5in.x22in.x25in.	37.5in.x22in.x25in.	37.5in.x22in.x25in.	37.5in.x22in.x25in.	37.5in.x22in.x25in.	37.5in.x22in.x25in.	39.5in.x28.5in.x26in.
Shipping weight	171 lbs.	171 lbs.	181 lbs.	171 lbs.	171 lbs.	181 lbs.	219 lbs.
Net weight	121 lbs.	121 lbs.	131 lbs.	121 lbs.	121 lbs.	131 lbs.	165 lbs.

Model #	JCW-2504-0MRB	JCW-2504-0MVB	JCW-2703-0MHB	JCW-2703-0MRB	JCW-3003-0MHB	JCW-3003-0MRB	JCW-3003-0MVB
Pressure (psi)	2500	2500	2700	2700	3000	3000	3000
Flow (gpm)	3.6	3.6	2.4	2.4	3.0	3.0	3.0
Engine	Subaru OHC	Vanguard OHV	Honda OHV	Subaru OHC	Honda OHV	Subaru OHC	Vanguard OHV
Horsepower	9.0	9.0	6.5	7.0	9.0	9.0	9.0
Dim. (LxWxH)	37.5in.x22in.x25in.	37.5in.x22in.x25in.	39.5in.x28.5in.x26in.	37.5in.x22in.x25in.	39.5in.x28.5in.x26in.	39.5in.x28.5in.x26in.	39.5in.x28.5in.x26in.
Shipping weight	211 lbs.	224 lbs.	174 lbs.	174 lbs.	219 lbs.	211 lbs.	224 lbs.
Net weight	157 lbs.	170 lbs.	124 lbs.	124 lbs.	165 lbs.	157 lbs.	170 lbs.

Model #	JCW-3004-0MHB	JCW-3004-0MVB	JCW-3504-0MHB	JCW-3504-0MVB	JCW-4003-0MHB	JCW-4003-0MVB
Pressure (psi)	3000	3000	3500	3500	4000	4000
Flow (gpm)	3.5	3.5	3.7	3.7	3.0	3.0
Engine	Honda OHV	Vanguard OHV	Honda OHV	Vanguard OHV	Honda OHV	Vanguard OHV
Horsepower	11.0	11.0	13.0	13.0	13.0	13.0
Dim. (LxWxH)	39.5in.x28.5in.x26in.	39.5in.x28.5in.x26in.	39.5in.x28.5in.x26in.	39.5in.x28.5in.x26in.	39.5in.x28.5in.x26in.	39.5in.x28.5in.x26in.
Shipping weight	238 lbs.	243 lbs.	238 lbs.	243 lbs.	238 lbs.	243 lbs.
Net weight	184 lbs.	189 lbs.	184 lbs.	189 lbs.	184 lbs.	189 lbs.



Modeled after the CW Premium Series, the JCW belt driven pressure washer series offers the performance and durability you expect from Mi-T-M, at an affordable price.

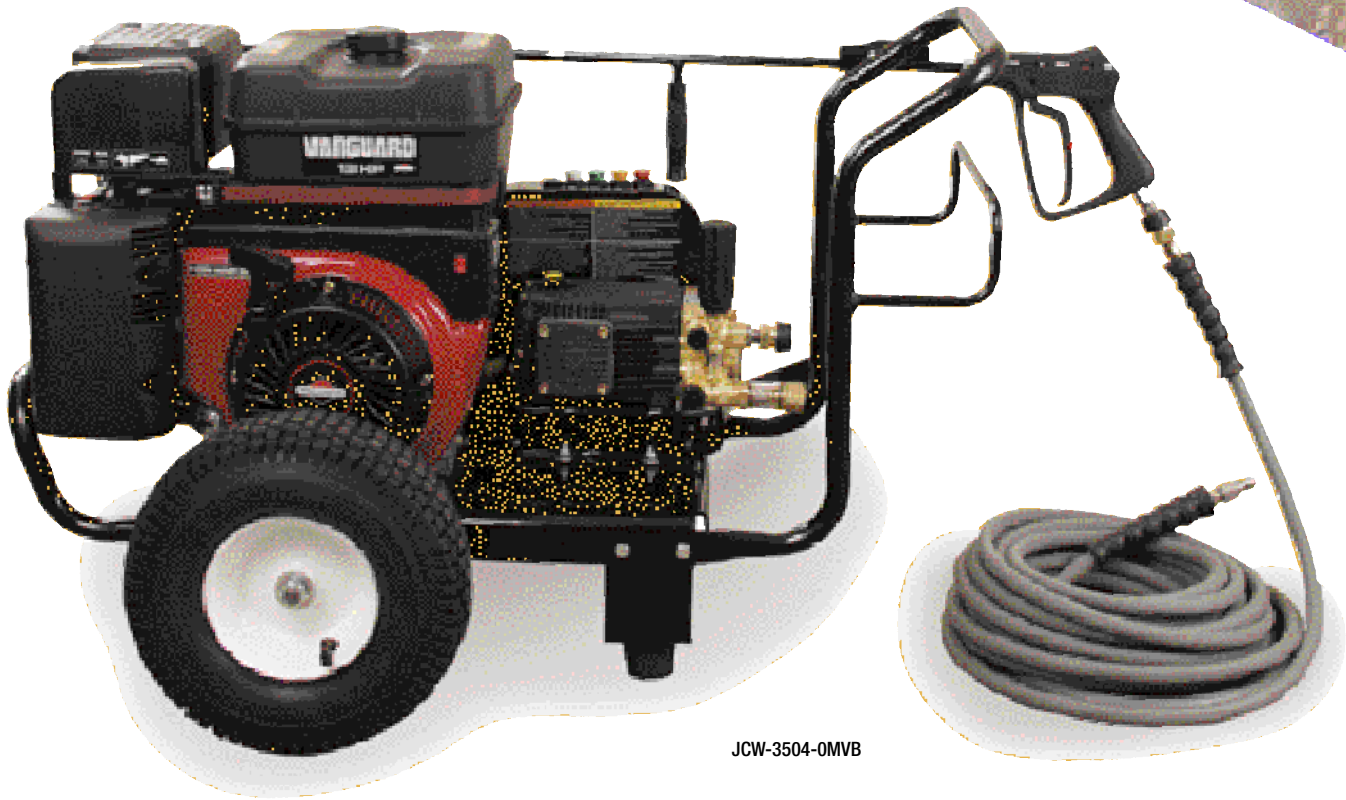

JCW-3504-0MVB

Additional Features

- Performance-proven engine with low-oil protection
- Belt drive triplex piston AR pump with ceramic plungers
- Thermal relief valve
- Adjustable pressure
- Stainless-steel and brass unloader
- Forged brass manifold (Nickel plated brass on 4000 PSI model)
- 1 inch powder coated steel tube handles
- 3/16 inch powder coated steel base plate with welded reinforcement for reduced vibration
- Convenient hose wrap
- Gun/wand holder for convenient storage
- Dual rubber isolators
- Quick connect nozzles (0°, 15°, 25° and 40°)
- Pneumatic tires with tubes for longer life
- 3/8 inch x 50 foot non-marking hose with quick connects, swivel and bend restrictors
- 36 inch lance with rubber grip
- Professional-grade insulated trigger gun with safety lock-off

**One (1) year limited parts
& labor warranty**

**Five (5) year limited
warranty on pump**

Options:

- CX-0005** **Insulated dual lance** - Has both a high and low pressure tip that allows you to switch to the low pressure chemical injector without having to change tips
- CX-0006** **4000 PSI hose** - Upgrades pressure hose to 4000 PSI rating
- AW-8400-0021** **Low pressure detergent injection** - Allows the user to apply the recommended detergents
- 50-0161** **High pressure detergent injection** - High pressure water mixes with detergent to clean even the heaviest build-up

Model #	CX-0005	CX-0006	50-0161	AW-8400-0021
All Models	●	●	●	●


CW Premium Series

Gasoline - Belt Drive


External bypass system allows more water into the system to protect from heat build-up



Water filter with clear sleeve for screen inspection




Powder coated 1 1/4 inch steel tube handles, gun/wand holder for convenient storage




CW-3004-4MGH

1/4 inch powder coated steel base plate



Heavy-duty dual cogged belt drive system to prevent slippage



Pneumatic mag tires with tubes for longer life and solid steel threaded axle



Model #	CW-2505-4MGH	CW-2505-4MGV	CW-3004-4MGH	CW-3004-4MGV	CW-3255-4MV0*	CW-3504-4MGH	CW-3504-4MGR
Pressure (psi)	2500	2500	3000	3000	3200	3500	3500
Flow (gpm)	4.4	4.4	3.5	3.5	4.9	3.7	3.7
Engine	Honda OHV	Vanguard OHV	Honda OHV	Vanguard OHV	Vanguard OHV	Honda OHV	Subaru OHC
Horsepower	11.0	11.0	11.0	11.0	16.0	13.0	13.0
Dim. (LxWxH)	45.5in.x28in.x26in.	45.5in.x28in.x26in.	45.5in.x28in.x26in.	45.5in.x28in.x26in.	46in.x28in.x30in.	46in.x28in.x30in.	46in.x28in.x30in.
Shipping weight	289 lbs.	295 lbs.	284 lbs.	284 lbs.	328 lbs.	291 lbs.	291 lbs.
Net weight	215 lbs.	221 lbs.	213 lbs.	220 lbs.	250 lbs.	216 lbs.	216 lbs.


Model #	CW-3504-4MGV	CW-4003-3MGH	CW-4003-3MGR	CW-4003-3MGV	CW-4004-3MV0*	CW-4004-4MV0**
Pressure (psi)	3500	4000	4000	4000	4000	4000
Flow (gpm)	3.7	3.0	3.0	3.0	4.0	4.0
Engine	Vanguard OHV	Honda OHV	Subaru OHC	Vanguard OHV	Vanguard OHV	Vanguard OHV
Horsepower	13.0	13.0	13.0	13.0	16.0	16.0
Dim. (LxWxH)	46in.x28in.x30in.	46in.x28in.x30in.	46in.x28in.x30in.	46in.x28in.x30in.	46in.x28in.x30in.	46in.x28in.x30in.
Shipping weight	293 lbs.	291 lbs.	291 lbs.	293 lbs.	327 lbs.	327 lbs.
Net weight	218 lbs.	216 lbs.	216 lbs.	218 lbs.	249 lbs.	249 lbs.

*Electric start (battery included).

^Model equipped with AR pump, all other models equipped with General pumps.



Built for longevity and reliability, these industrial belt-driven pressure washers are the foundation of Mi-T-M.

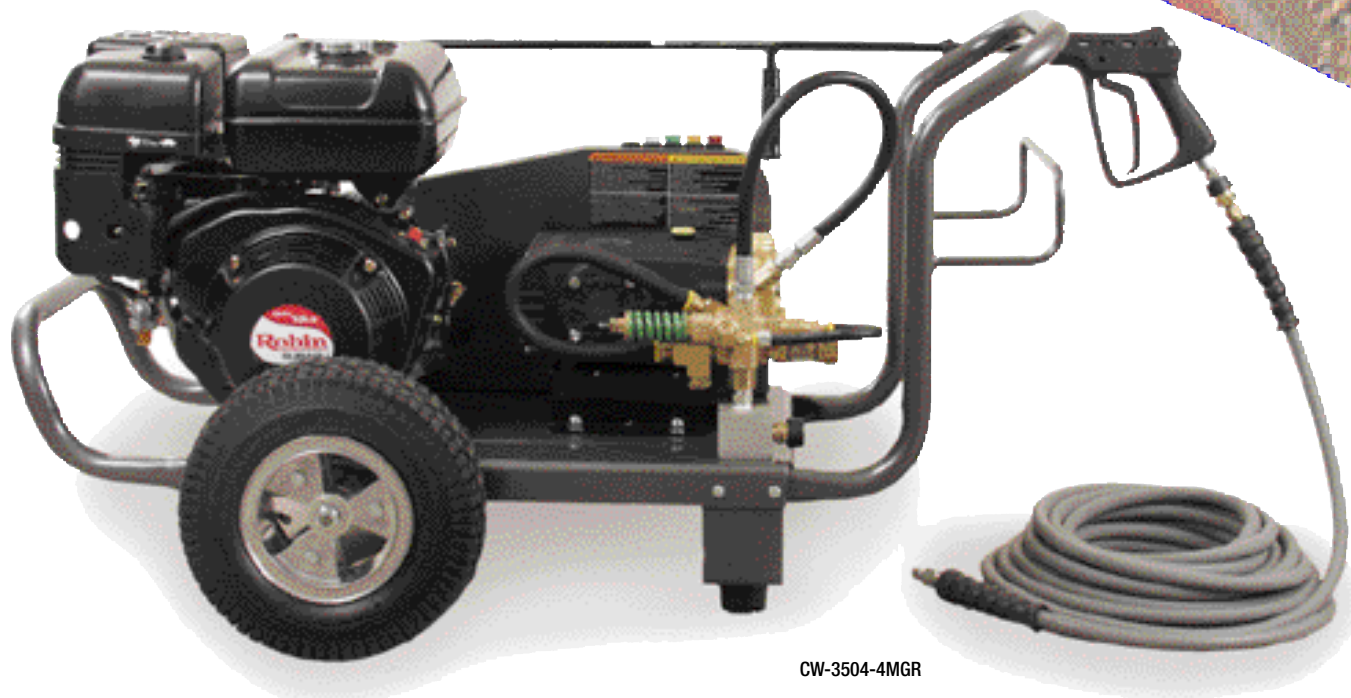

CW-3504-4MGR

Additional Features

- Performance-proven engine with low-oil protection
- Belt drive triplex piston General or AR pump with ceramic plungers
- Thermal relief valve
- Stainless-steel and brass unloader mounted on base plate
- Forged brass manifold (nickel plated brass on CW-4004-3MVO)
- Two-piece belt guard with 1/4-turn release for quick access to belts
- Convenient hose wrap
- Dual rubber isolators
- Quick connect nozzles (0°, 15°, 25° and 40°)
- 3/8 inch x 50 foot non-marking hose with quick connects, swivel and bend restrictors
- Professional-grade insulated trigger gun with safety lock-off
- 36 inch lance with rubber grip

Two (2) year limited parts & labor warranty

Five (5) year limited warranty on pump

Options:

CX-0005

Insulated dual lance - Has both a high and low pressure tip that allows you to switch to the low pressure chemical injector without having to change tips

CX-0006

4000 PSI hose - Upgrades pressure hose to 4000 PSI rating

CX-0027, CX-0045

Electric start (battery included) - For easy starting

CX-0050, CX-0051

Electric start (battery included) - For easy starting

CX-0054, CX-0055

Roll cage - Designed for cold water pressure washers to protect equipment, comes with lifting hook, 1-1/4 inch powder coated steel tubing

AW-8400-0021

Low pressure detergent injection - Allows the user to apply the recommended detergents

50-0161

High pressure detergent injection - High pressure water mixes with detergent to clean even the heaviest build-up

Model #	CX-0005	CX-0006	CX-0027	CX-0045	CX-0050	CX-0051	CX-0054	CX-0055	50-0161	AW-8400-0021
CW-2505-4MGH	●	●	●				●		●	●
CW-2505-4MGV	●	●			●		●		●	●
CW-3004-4MGH	●	●	●				●		●	●
CW-3004-4MGV	●	●			●		●		●	●
CW-3255-4MVO	●								●	●
CW-3504-4MGH	●			●			●		●	●
CW-3504-4MGR	●						●		●	●
CW-3504-4MGV	●					●	●		●	●
CW-4003-3MGH	●			●			●		●	●
CW-4003-4MGR	●						●		●	●
CW-4003-3MGV	●					●	●		●	●
CW-4004-3MVO	●							●	●	●
CW-4004-4MVO	●							●	●	●

Mi-T-M Corporation • 800-553-9053 • E-mail: corp@mtm.com • Website: www.mitm.com

CW Series


Our large electric belt drive unit is great for cleaning inside manufacturing facilities or shop areas.

Electric - Belt Drive

External bypass system creates less heat build-up



Water filter with clear sleeve for screen inspection



Additional Features

- Totally enclosed fan-cooled electric motor with thermal overload protection
- Belt drive triplex piston General pump with ceramic plungers
- Forged brass manifold
- Stainless-steel and brass unloader
- Thermal relief valve
- 10 foot power cord (35 foot on CW-2004-1ME1)
- Heavy-duty dual cogged belt drive system and cast-iron pulleys
- Hose wrap with gun/wand holder
- Dual rubber isolators

Totally enclosed powder coated steel belt guard



Two (2) year limited parts & labor warranty
Five (5) year limited warranty on pump

- Solid steel threaded axle
- Pneumatic tires with tubes for longer life
- Quick connect nozzles (0°, 15°, 25° 40°)
- 3/8 inch x 50 foot non-marking hose with quick connects, swivel and bend restrictors
- Professional-grade insulated trigger gun with safety lock-off
- 36 inch lance with rubber grip



CW-2405-4ME1

Model #	CW-2004-1ME1*	CW-2004-1ME3^	CW-2405-4ME1	CW-2405-4ME3^	CW-3004-4ME1	CW-3004-4ME3^
Pressure (psi)	2000	2000	2400	2400	3000	3000
Flow (gpm)	3.6	3.6	4.6	4.6	3.5	3.5
Motor	230V, 1Ø, 21.5A	230V, 3Ø, 14.0A or 460V, 3Ø, 7.0A	230V, 1Ø, 35.7A	230V, 3Ø, 24.7A or 460V, 3Ø, 11.5A	230V, 1Ø, 35.0A	230V, 3Ø, 23.0A or 460V, 3Ø, 11.5A
Horsepower	5.0	5.0	7.5	8.0	7.5	8.0
Dim. (LxWxH)	40in.x32.5in.x25.5in.	40in.x32.5in.x25.5in.	46in.x28in.x30in.	46in.x28in.x30in.	46in.x28in.x30in.	46in.x28in.x30in.
Shipping weight	259 lbs.	247 lbs.	347 lbs.	270 lbs.	347 lbs.	270 lbs.
Net weight	172 lbs.	160 lbs.	335 lbs.	257 lbs.	335 lbs.	257 lbs.

NEMA L15-20P,
20 amp plug

NEMA L15-30P,
30 amp plug

Model #	CW-3005-0ME1	CW-3005-0ME3^	CW-3006-4ME3^	CW-4004-0ME3^	CW-5004-0ME3^
Pressure (psi)	3000	3000	3000	4000	5000
Flow (gpm)	4.8	4.8	5.7	3.9	4.0
Motor	230V, 1Ø, 37.5A	230V, 3Ø, 25.6A or 460V, 3Ø, 12.8A	230V, 3Ø, 40.0A or 460V, 3Ø, 20.0A	230V, 3Ø, 40.0A or 460V, 3Ø, 20.0A	230V, 3Ø, 40.0A or 460V, 3Ø, 20.0A
Horsepower	10.0	10.0	15.0	15.0	15.0
Dim. (LxWxH)	45.5in.x32.5in.x30in.	45.5in.x32.5in.x30in.	45.5in.x32.5in.x30in.	45.5in.x32.5in.x30in.	45.5in.x32.5in.x30in.
Shipping weight	470 lbs.	520 lbs.	556 lbs.	556 lbs.	565 lbs.
Net weight	329 lbs.	379 lbs.	415 lbs.	415 lbs.	424 lbs.

NEMA L6-30P,
30 amp plug

NEMA 15-50P,
50 amp plug

NEMA 6-50P,
50 amp plug

Options:

- Consult Factory** 460V, 3 Phase Models - For when you have 460 volts of power available
- CX-0005** Insulated dual lance - Has both a high and low pressure tip that allows you to switch to the low pressure chemical injector without having to change tips
- CX-0006** 4000 PSI Hose - Upgrades pressure hose to 4000 PSI rating
- AW-8400-0021** Low pressure detergent injection - Allows the user to apply the recommended detergents
- 50-0161** High pressure detergent injection - High pressure water mixes with detergent to clean even the heaviest build-up


Model #	460V	CX-0005	CX-0006	50-0161	AW-8400-0021
CW-2004-1ME1					
CW-2004-1ME3					
CW-2405-4ME1					
CW-2405-4ME3					
CW-3004-4ME1					
CW-3004-4ME3					
CW-3005-0ME1					
CW-3005-0ME3					
CW-3006-4ME3					
CW-4004-0ME3					
CW-5004-0ME3					

Electric - Belt Drive - Stationary

CW Series

These washers run quiet with no engine exhaust, which makes them ideal for indoor use.


Pump accepts incoming water up to 180°F



Removable panel for pump access



Stainless-steel base and frame




Optional stainless-steel wall mounting bracket available



CW-2004-SME1

Time delay shutdown will shut unit off automatically when trigger gun is released and timer reaches setting



Two (2) year limited parts & labor warranty

Five (5) year limited warranty on pump

Additional Features

- Totally enclosed fan-cooled electric motor (manual thermal overload protection on CW-2004 only)
- Belt drive triplex ceramic General plunger pump
- Thermal relief valve
- Stainless-steel and brass unloader mounted on base plate
- Forged brass manifold
- In-line water strainer
- Low pressure detergent injection
- Bypass system
- Dual cogged belt drive system
- 4 foot electrical cord with ground fault circuit interrupter (NEMA 5-20P, 20 amp plug on 1000 PSI model)
- Conveniently located on/off switch
- Easy-to-access cabinet design
- Rubber isolators
- Quick connect nozzles (0°, 15°, 25° and 40°)
- 3/8 inch x 50 foot non-marking hose with quick connects, swivel and bend restrictors
- Professional-grade insulated trigger gun with safety lock-off
- Adjustable pressure insulated dual lance

Model #	CW-1003-SME1	CW-2004-SME1
Pressure (psi)	1000	2000
Flow (gpm)	2.5	3.9
Motor	120V/1Ø/18.8A	230V/1Ø/24.1A
Horsepower	2.0	6.0
Dim. (LxWxH)	29.5in.x20.5in.x15in.	29.5in.x20.5in.x15in.
Shipping weight	259 lbs.	259 lbs.
Net weight	172 lbs.	172 lbs.



NEMA 5-20P,
20 amp plug



NEMA L6-30P,
30 amp plug

Options:

AW-9501-0000

Stainless-steel wall mounting bracket - Provides a permanent location for your pressure washer in a shop or plant facility

Model #	AW-9501-0000
All Models	●

MT-M Corporation • 800-553-9053 • E-mail: corp@mtm.com • Website: www.mtm.com

CW Series

When durability is important, these cold water diesel units are the choice for airports, offshore applications and shipyards.

Diesel - Belt Drive

**Belt drive
triplex
ceramic
General
plunger
pump**



**Professional
Yanmar
diesel
engine**



**Four cylinder,
four cycle
water-
cooled
Kubota
diesel engine**



CW-3004-4MDY



CW-6106-2MDK

Additional Features

- Stainless-steel and brass unloader with fixed pressure
- Forged brass manifold (nickel plated on Kubota model)
- Thermal relief valve
- Totally enclosed powder coated steel belt guard
- Hose wrap and gun/wand holder
- Quick connect nozzles (0°, 15°, 25° and 40°)
- Professional-grade insulated trigger gun with safety lock-off

Yanmar Features

- Water filter with clear sleeve for screen inspection
- Dual cogged belt drive system with cast iron pulleys
- Powder coated steel tube handles
- 1/4 inch powder coated base plate
- Rubber isolators
- Solid steel threaded axle
- Pneumatic tires with tubes

- 3/8 inch x 50 foot non-marking hose with quick connects, swivel and bend restrictors
- 36 inch lance with rubber grip and quick connect nozzles

Kubota Features

- 12V electric starter with alternator and regulator
- Pressure indicating gauge
- Pressure adjustable 1000 - 6100 PSI by engine throttle
- Positive drive synchronous belt/sprocket system
- Large 20 gallon float tank (unloader bypasses to tank)
- Easily accessible control panel
- Powder coated heavy-duty steel channel skid frame
- Roll cage and lifting hook
- 1/2 inch x 50 foot steel wire braided pressure hose
- 48 inch lance with adjustable grip and #5.0 nozzle

Model #	CW-2505-4MDY	CW-3004-4MDY	CW-6106-2MDK*
Pressure (psi)	2500	3000	6100
Flow (gpm)	4.4	3.5	6.3
Engine	Yanmar	Yanmar	Kubota
Horsepower	9.0	9.0	37.5
Dim. (LxWxH)	46in.x28in.x30in.	46in.x28in.x30in.	55in.x42in.x52.5in.
Shipping weight	321 lbs.	321 lbs.	1535 lbs.
Net weight	250 lbs.	250 lbs.	1010 lbs.

*Electric start (battery included).

Options:

CX-0005

Insulated dual lance - Has both a high and low pressure tip that allows you to switch to the low pressure chemical injector without having to change tips

CX-0006

4000 PSI Hose - Upgrades pressure hose to 4000 PSI rating

CX-0044

Electric start (battery included) - For easy starting

CX-0056

Roll cage - Designed for cold water pressure washers to protect equipment, comes with lifting hook, 1-1/4 inch powder coated steel tubing

AW-8400-0021

Low pressure detergent injection - Allows the user to apply the recommended detergents

50-0161

High pressure detergent injection - High pressure water mixes with detergent to clean even the heaviest build-up

Model #	CX-0005	CX-0006	CX-0044	CX-0056	50-0161	AW-8400-0021
Yanmar Models	●	●	●	●	●	●

ETL Listed

- CW-2505-4MDY
- CW-3004-4MDY



Certified
to UL-1776
Standards

**Two (2) year limited parts
& labor warranty**

**Five (5) year limited
warranty on pump**

Gasoline - Belt Drive

CWC Series

This versatile unit features an 8 hour run time and is perfect for continuous use applications.


**Electric start
(battery
included)**




**Removable
fuel tank
(11.5 gallon
capacity)
allows for
8 hour running
time**



**Powder
coated steel
frame with
roll cage
and lifting
hook**



**Pneumatic
mag tires
with tubes,
locking tire
brake and
solid steel
threaded axles**



CWC-5004-1MGH

**Two (2) year limited parts
& labor warranty**

**Five (5) year limited
warranty on pump**



Additional Features

- Performance-proven OHV engine with low-oil protection
- Belt drive triplex piston General or AR pump with ceramic plungers
- Thermal relief valve
- Preset stainless-steel and brass unloader
- Forged brass manifold
- Safety relief valve
- Water filter with clear sleeve for screen inspection
- Heavy-duty dual cogged belt drive system with cast iron pulleys
- Two-piece belt guard with 1/4-turn release for quick access to belts
- Hose wrap with gun/wand holder
- Quick connect nozzles (0°, 15°, 25° and 40°)
- 3/8 inch x 50 foot non-marking hose with quick connects, swivel and bend restrictors
- Professional-grade insulated trigger gun with safety lock-off
- 48 inch lance with rubber grip (36 inch lance with rubber grip on CWC-4004-1MGV only)

Model #	CWC-4004-1MGV	CWC-4005-0MGH*	CWC-4005-1MGH	CWC-5004-0MGH*	CWC-5004-1MGH
Pressure (psi)	4000	4000	4000	5000	5000
Flow (gpm)	4.0	5.0	5.0	4.0	4.0
Engine	Vanguard OHV	Honda OHV	Honda OHV	Honda OHV	Honda OHV
Horsepower	16.0	20.0	20.0	20.0	20.0
Dim. (LxWxH)	43in.x27.75in.x36in.	343in.x27.75in.x36in.	43in.x27.75in.x36in.	43in.x27.75in.x36in.	43in.x27.75in.x36in.
Shipping weight	481 lbs.	501 lbs.	501 lbs.	501 lbs.	501 lbs.
Net weight	358 lbs.	378 lbs.	378 lbs.	378 lbs.	378 lbs.

*Models equipped with General pumps, all other models equipped with AR pumps.



**Certified
to UL-1776
Standards**

M-T-M Corporation • 800-553-9053 • E-mail: corp@mtm.com • Website: www.mtm.com